

1. Application 用途

- ◆ Industrial, Consume and so on


2. Features 特性

- ◆ Comply with IEC60335,IEC62368
- ◆ ≥95% Efficiency
- ◆ ROHS、Reach Compliant
- ◆ Operating Temperature Range: -40℃ to +130℃


3. Picture 图片




4. Schematic 原理图




5. Dimension (Unit: mm) 外形尺寸




FRONT VIEW

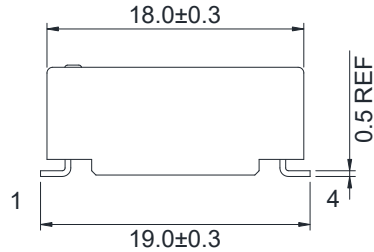

SIDE VIEW

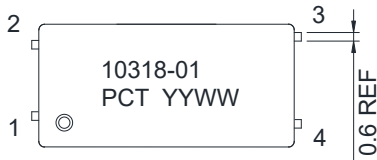

TOP VIEW

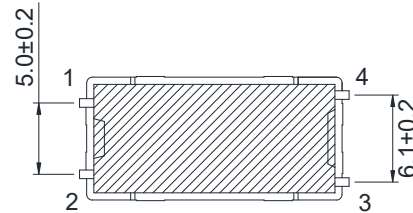

BOTTOM VIEW

6. Electrical Characteristics 电气特性

Electrical Specifications@25℃										
Part NO.	Output power(W)	Inductance (uH) 1KHz,1V		Lk(uH) 1KHz,1V	Turns Ratio 20KHz,1V	DCR (mΩ MAX)				HI-POT(VAC) mA/3S
		2-1	4-1	/	4-1:2-1	2-1	4-1	/	/	/
10318-01	1.0	20.0±5.0%	18.0±5.0%	/	1:40	325.0	264.5	/	/	/