

1. Application 用途

- ◆ Consume, Industrial, New energy and so on

3. Picture 图片




2. Features 特性

- ◆ Low profile and SMD design
- ◆ Comply with IEC60335, IEC62368
- ◆ $\geq 98\%$ Efficiency
- ◆ ROHS、Reach Compliant
- ◆ Operating Temperature Range: -40°C to $+155^{\circ}\text{C}$

4. Schematic 原理图



5. Dimension (Unit: mm) 外形尺寸

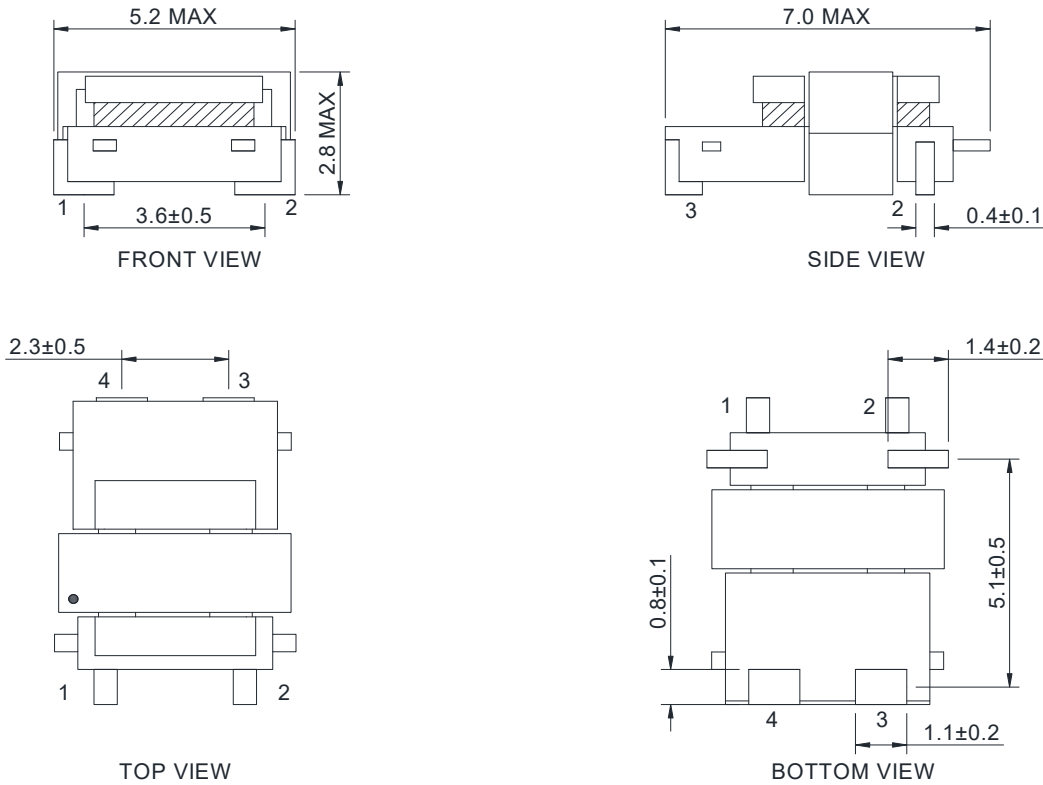

6. Electrical Characteristics 电气特性

Electrical Specifications@25°C									
Part NO.	Inductance (uH) 100KHz, 1V		Primary Current(A)	Turns Ratio 100KHz, 1V	DCR (mΩ MAX)				HI-POT(VDC) 2mA/60S
10405-02	1-2	/	/	N1:N2	1-2	/	/	/	PRI-SEC
	180.0 MIN	/	6	1:50	3.0	/	/	/	1500