

1. Application 用途

- ◆ Consume and so on


2. Features 特性

- ◆ Through hole design
- ◆ Comply with IEC60335, IEC62368
- ◆ $\geq 95\%$ Efficiency
- ◆ ROHS、Reach Compliant
- ◆ Operating Temperature Range: -40°C to $+130^{\circ}\text{C}$


3. Picture 图片



4. Schematic 原理图

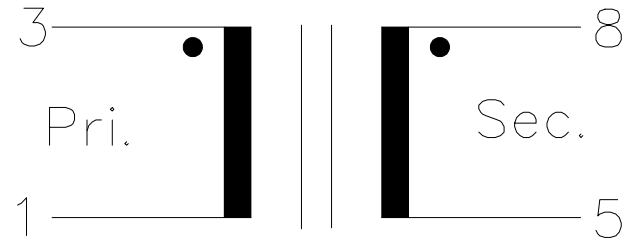

5. Dimension (Unit: mm) 外形尺寸

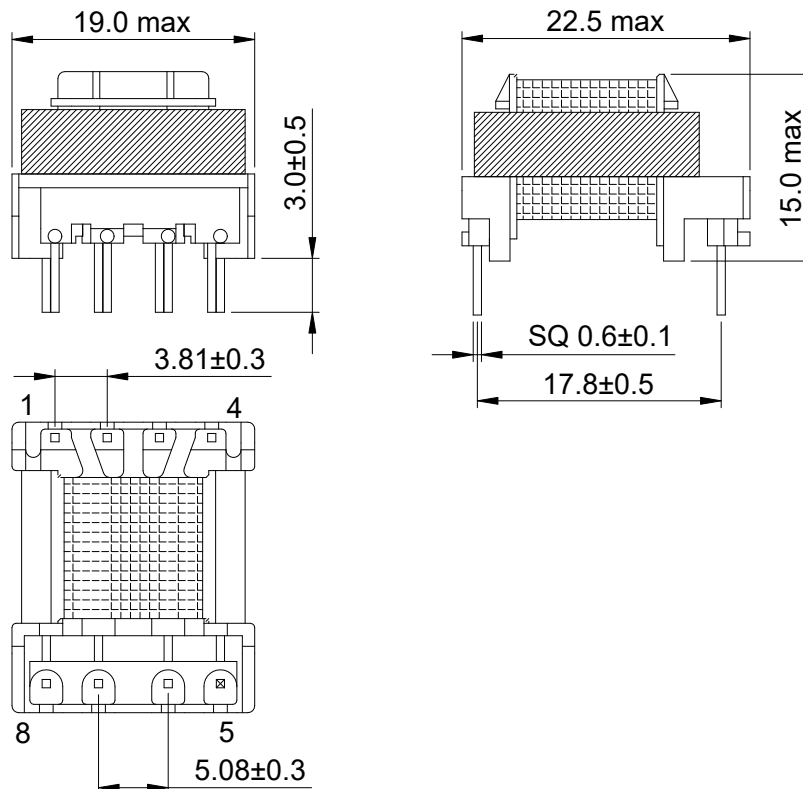

6. Electrical Characteristics 电气特性

Electrical Specifications@25 $^{\circ}\text{C}$

Part NO.	Output power(W)	Inductance (uH) 10KHz, 0.3V	Lk(uH) 1KHz, 1V	Turns Ratio 20KHz, 1V	DCR (m Ω MAX)				HI-POT(VAC) mA/3S
					3-1	8-5	/	/	PRS-SEC
1211016-1210	28	3-1	3-1	3-1:8-5	3-1	8-5	/	/	3000
		214 $\pm$ 10%	4 Max	3.2:1	84	42	/	/	