

1. Application 用途

- ◆ Industrial Power Supply


2. Features 特性

- ◆ Comply with IEC62368
- ◆ $\geq 98\%$ Efficiency
- ◆ ROHS、Reach Compliant
- ◆ Operating Temperature Range: -40°C to $+155^{\circ}\text{C}$


3. Picture 图片




4. Schematic 原理图




5. Dimension (Unit: mm) 外形尺寸




FRONT VIEW

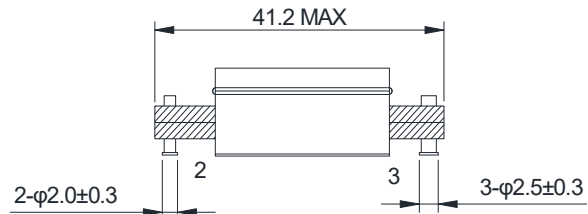

SIDE VIEW

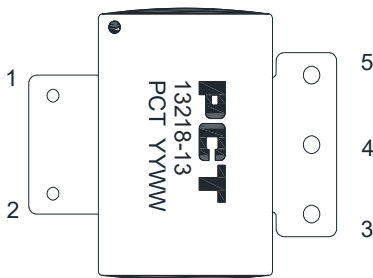

TOP VIEW

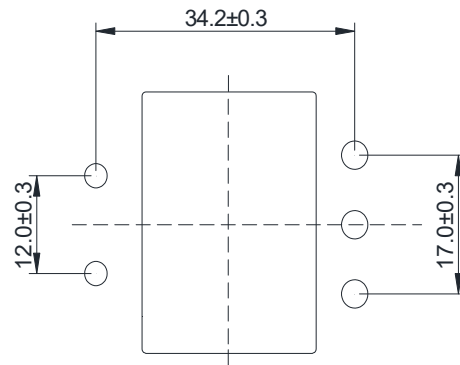

SUGGESTED PAD LAYOUT

6. Electrical Characteristics 电气特性

Electrical Specifications@25°C

Part NO.	Output power(W)	Inductance (uH)	Lk(uH)	Turns Ratio	DCR				HI-POT(VAC)
		100KHz,0.3V	100KHz,0.3V	100KHz,1V	(mΩ MAX)				1.0mA/60S
13218-13	300	1-3	/	N1:N2:N3	/	/	/	/	PRI-SEC
		153.6±25%	/	1:0.5:0.5	/	/	/	/	1500