

1. Application 用途

- ◆ Consume and so on


2. Features 特性

- ◆ Through hole design
- ◆ Comply with IEC60335, IEC62368
- ◆ $\geq 95\%$ Efficiency
- ◆ ROHS、Reach Compliant
- ◆ Operating Temperature Range: -40°C to $+130^{\circ}\text{C}$


3. Picture 图片



4. Schematic 原理图

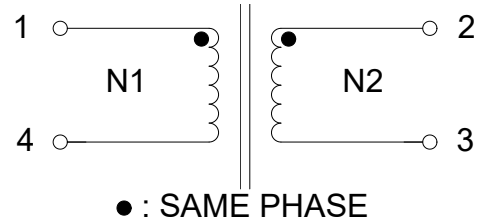

5. Dimension (Unit: mm) 外形尺寸

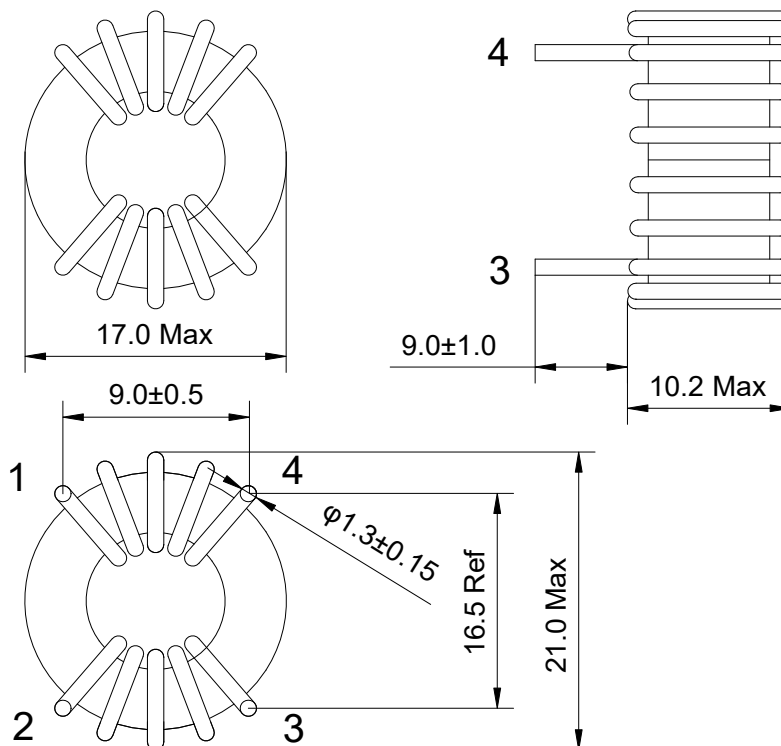

6. Electrical Characteristics 电气特性

Electrical Specifications@25°C

Part NO.	Output power(W)	Inductance (uH)		Lk(uH)	Turns Ratio	DCR				HI-POT(VAC)
		10KHz, 1V	1KHz, 1V	1KHz, 1V	20KHz, 1V	(m Ω MAX)				mA/3S
1575016-1102	-	1-4	2-3	/	1-4:2-3	1-4	2-3	/	/	PRI-SEC
		41 Min	41 Min	/	1:1	1.8	1.8	/	/	500