


1. Application 用途

- ◆ Consume and so on


2. Features 特性

- ◆ Through hole design
- ◆ Comply with IEC60335, IEC62368
- ◆ ≥95% Efficiency
- ◆ ROHS、Reach Compliant
- ◆ Operating Temperature Range: -40℃ to +130℃


3. Picture 图片

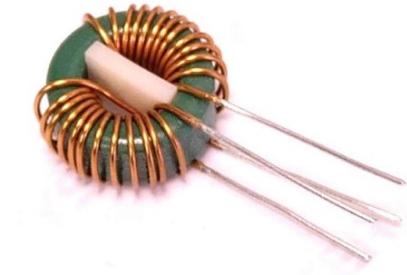

4. Schematic 原理图

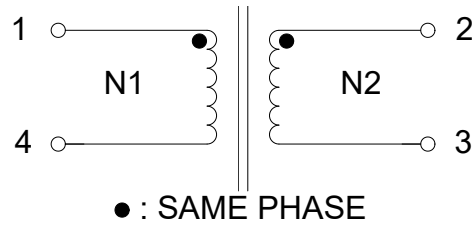

5. Dimension (Unit: mm) 外形尺寸

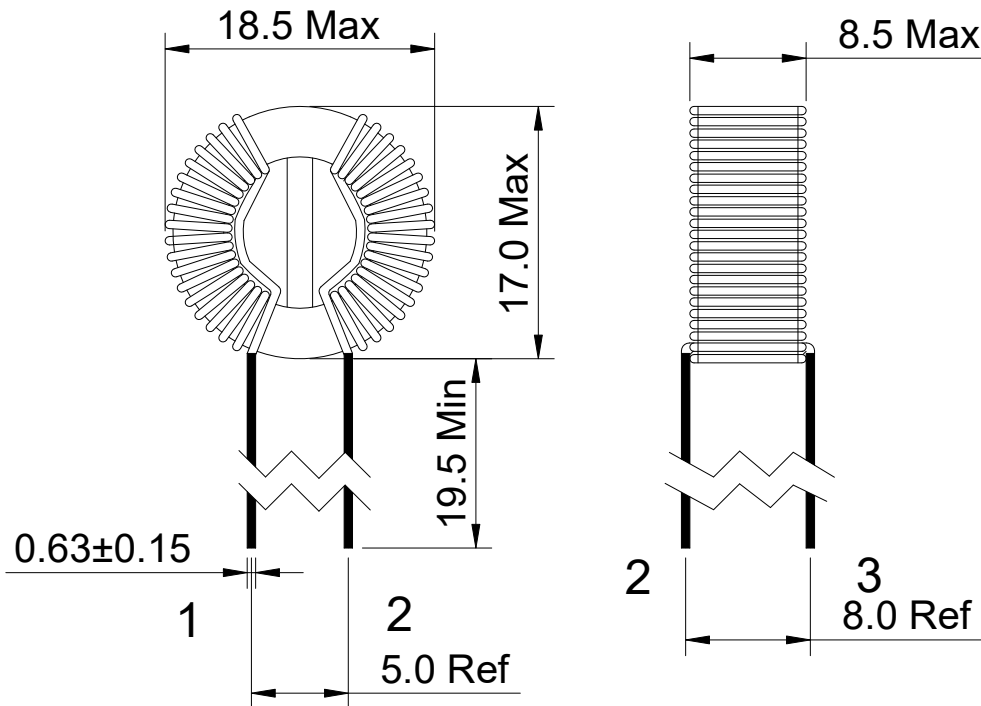

6. Electrical Characteristics 电气特性

Electrical Specifications@25℃

Part NO.	Output power(W)	Inductance (uH)		Lk(uH)	Turns Ratio	DCR				HI-POT(VAC)
		10KHz, 1V	10KHz, 1V	1KHz, 1V	20KHz, 1V	(mΩ MAX)				mA/3S
1575016-1104	-	1-4	2-3	/	1-4:2-3	1-4	2-3	/	/	PRI-SEC
		434 Min	434 Min	/	1:1	21	21	/	/	500