

1. Application 用途

- ◆ Consume and so on


2. Features 特性

- ◆ Through hole design
- ◆ Comply with IEC60335, IEC62368
- ◆ $\geq 95\%$ Efficiency
- ◆ ROHS、Reach Compliant
- ◆ Operating Temperature Range: -40°C to $+130^{\circ}\text{C}$


3.




4. Schematic 原理图



5. Dimension (Unit: mm) 外形尺寸

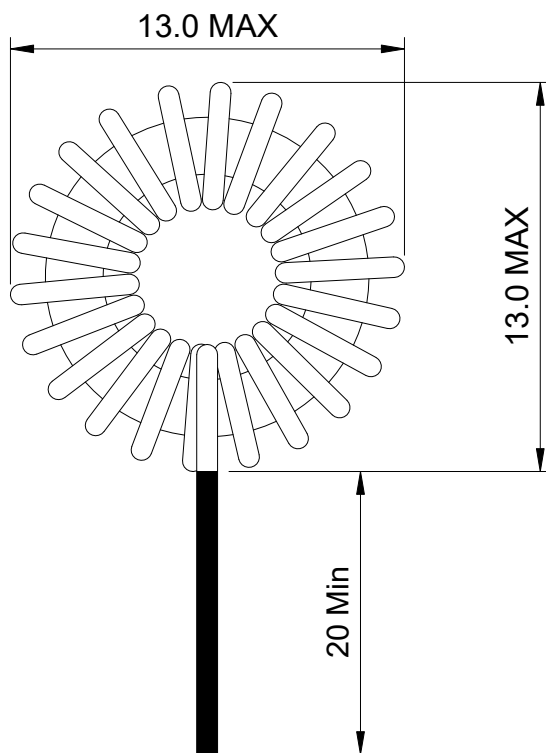

FRONT VIEW

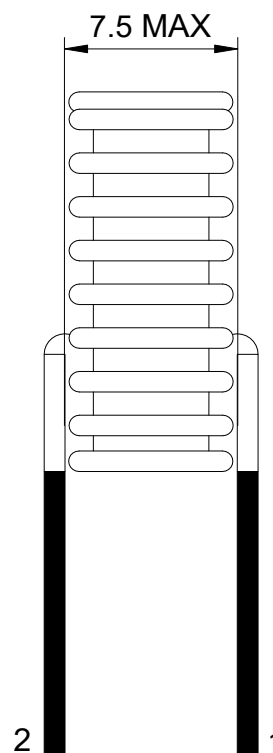

SIDE VIEW

6. Electrical Characteristics 电气特性

Electrical Specifications@25°C

Part NO.	Output power(W)	Inductance (uH)		Lk(uH)	Turns Ratio	DCR			HI-POT(VAC)
		10KHz, 1V				(mΩ MAX)			
1575090-1299	/	2-1	/	/	2-1	2-1	/	/	/
		30.63 ± 10%	/	/	25	50	/	/	/