

1. Application 用途

◆ INDUSTRIAL DC-DC


3. Picture 图片




2. Features 特性

- ◆ Hi-Pot: 3750 VAC
- ◆ Basic insulation comply with IEC 60664, IEC62368
- ◆ ROHS、Reach Compliant
- ◆ Operating Temperature Range: -40℃ to +130℃

4. Schematic 原理图

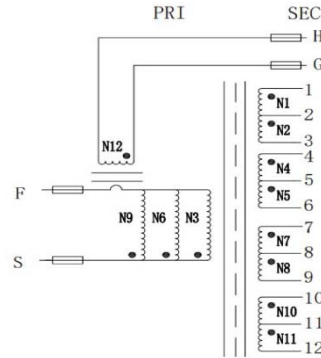

5. Dimension (Unit: mm) 外形尺寸

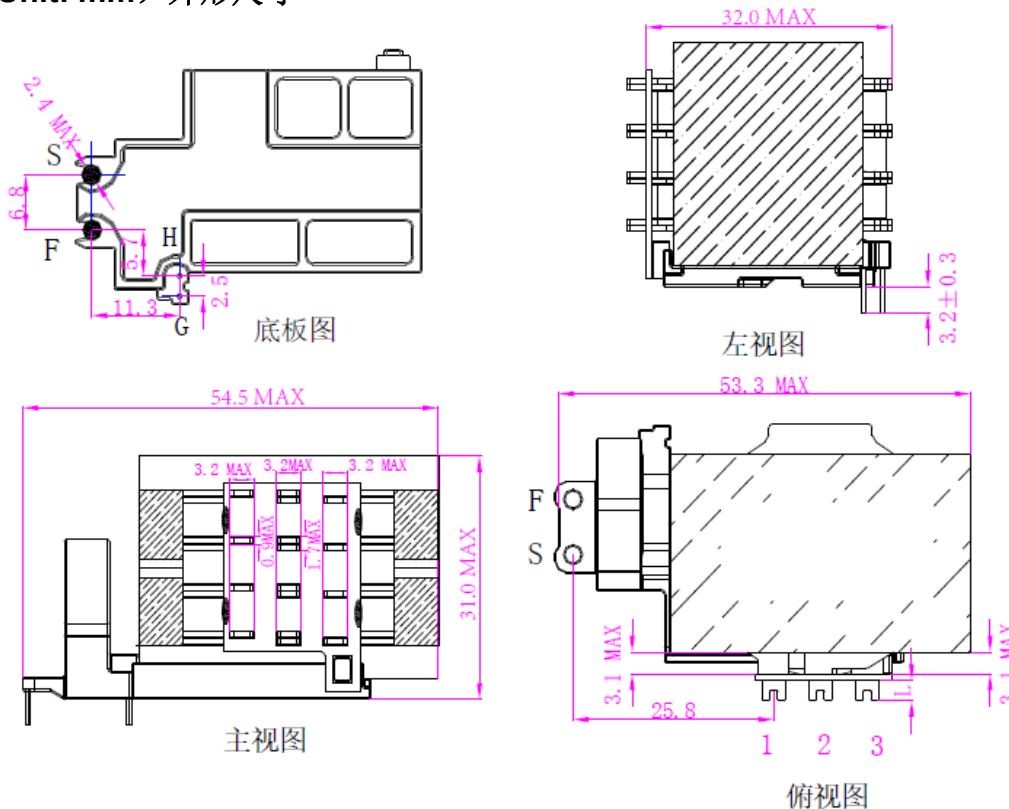

6. Electrical Characteristics 电气特性

Electrical Specifications@25℃								
Part NO.	Output power(W)	Inductance(uH) 100KHz, 1V	Lk(uH)MAX 100KHz, 1V	Turns Ratio 20KHz, 1V	DCR (mΩ MAX)			HI-POT 1mA/3S
2216038-0285	1300	S~F	S~F	S-F:1-2:2-3	S~F	1~2	2-3	PRI-SEC
		220	2.5	1:0.0625:0.0625	25	0.5	0.5	3750 VAC