

1. Application 用途

- ◆ Industrial, New energy and so on


2. Features 特性

- ◆ Comply with IEC62368-1
- ◆ ≥85% Efficiency
- ◆ ROHS、Reach Compliant
- ◆ Operating Temperature Range: -40℃ to +125℃


3. Picture 图片



4. Schematic 原理图



5. Dimension (Unit: mm) 外形尺寸

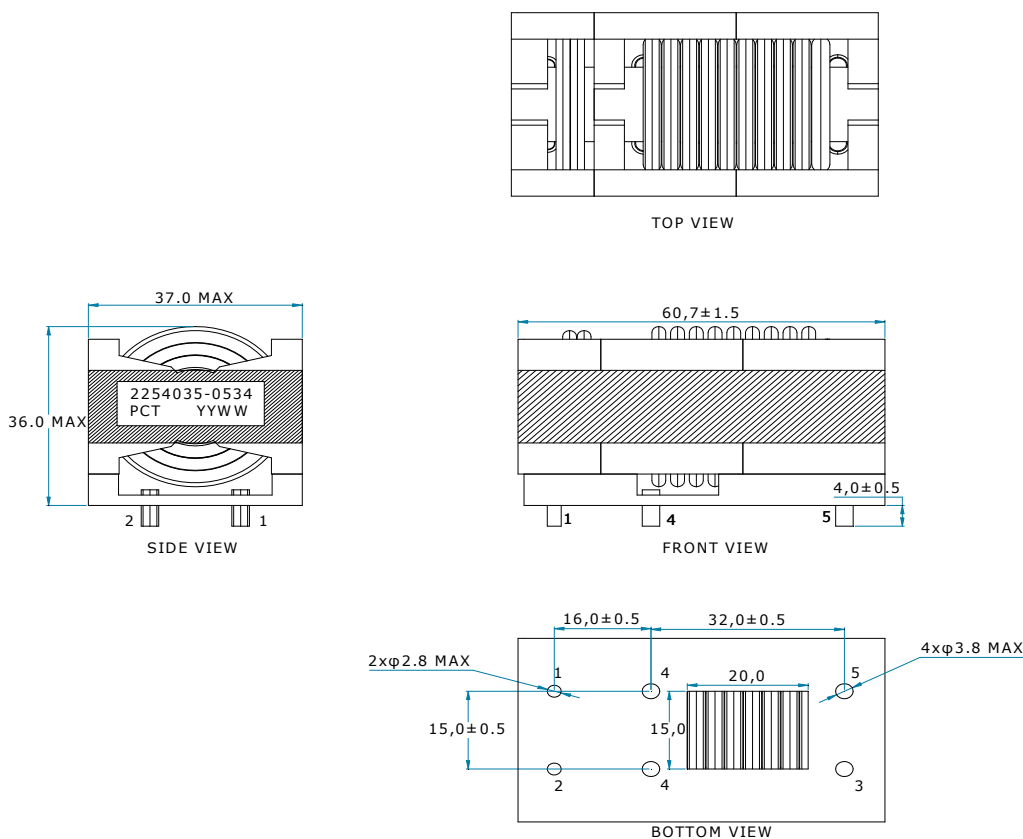

6. Electrical Characteristics 电气特性

Electrical Specifications@25℃							
Part NO.	Output power(KW)	Inductance (uH) 100KHz,1V	Lk(uH) MAX 100KHz,1V	Turns Ratio 20KHz,1V	DCR (mΩ MAX)		HI-POT(VAC) 1mA/3S
2254035-0534	750	1-2	1-2	a-2:5-4/4-3	1-2	5-4/ 4-3	PIR-SEC
		175±10%	30 MAX	3.8:1:1	20	3.0	3.0KV