High-Frequency Transformer

1. Application 用途

- Industrial, New energy and so on

2. Features 特性

- Comply with IEC62368-1
- ≥95% Efficiency
- ROHS、Reach Compliant
- Operating Temperature Range：-40℃ to +125℃

3. Picture 图片

4. Schematic 原理图



5. Dimension（Unit: mm）外形尺寸

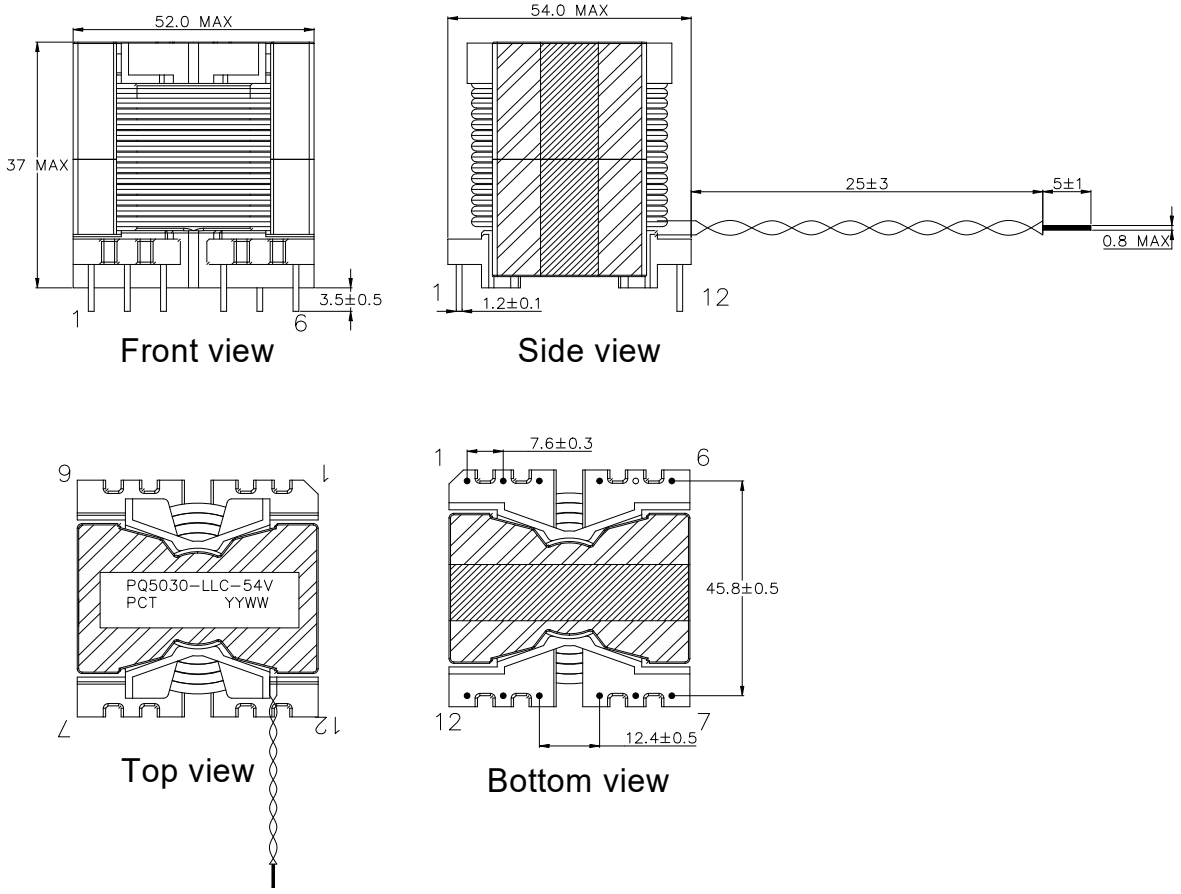

6. Electrical Characteristics 电气特性

Electrical Specifications@25℃									
Part NO.	Output power(W)	Inductance (uH) 10KHz,0.25V	Lk(uH) MAX 10KHz,0.25V	Turns Ratio 20KHz,1V	DCR (mΩ MAX)				HI-POT(VAC) 1mA/3S
2254050-0872	800	4-6	1-3	N1: N2/N3:N4/N5:N6/N7	4-6	8-9 10-11	3-1 1-2	7-A A-12	PIR-SEC
		120±7	7.0	1:0.28:0.14:0.21	27	6.0	135	205	3.6KV

Tel：(86 769)8652 8122
http://www.pcthk.com
Company: PCT DONGGUAN ELECTRICAL CO., LTD
Address：Xiang Xi Ind. Zone, Shi Pai Town, Dongguan, Guangdong, CHINA (Postal Code 523345)