

1. Application 用途

- ◆ Industrial, New energy and so on


2. Features 特性

- ◆ Comply with IEC62368-1
- ◆ $\geq 85\%$ Efficiency
- ◆ ROHS、Reach Compliant
- ◆ Operating Temperature Range: -40°C to $+125^{\circ}\text{C}$


3. Picture 图片



4. Schematic 原理图



5. Dimension (Unit: mm) 外形尺寸

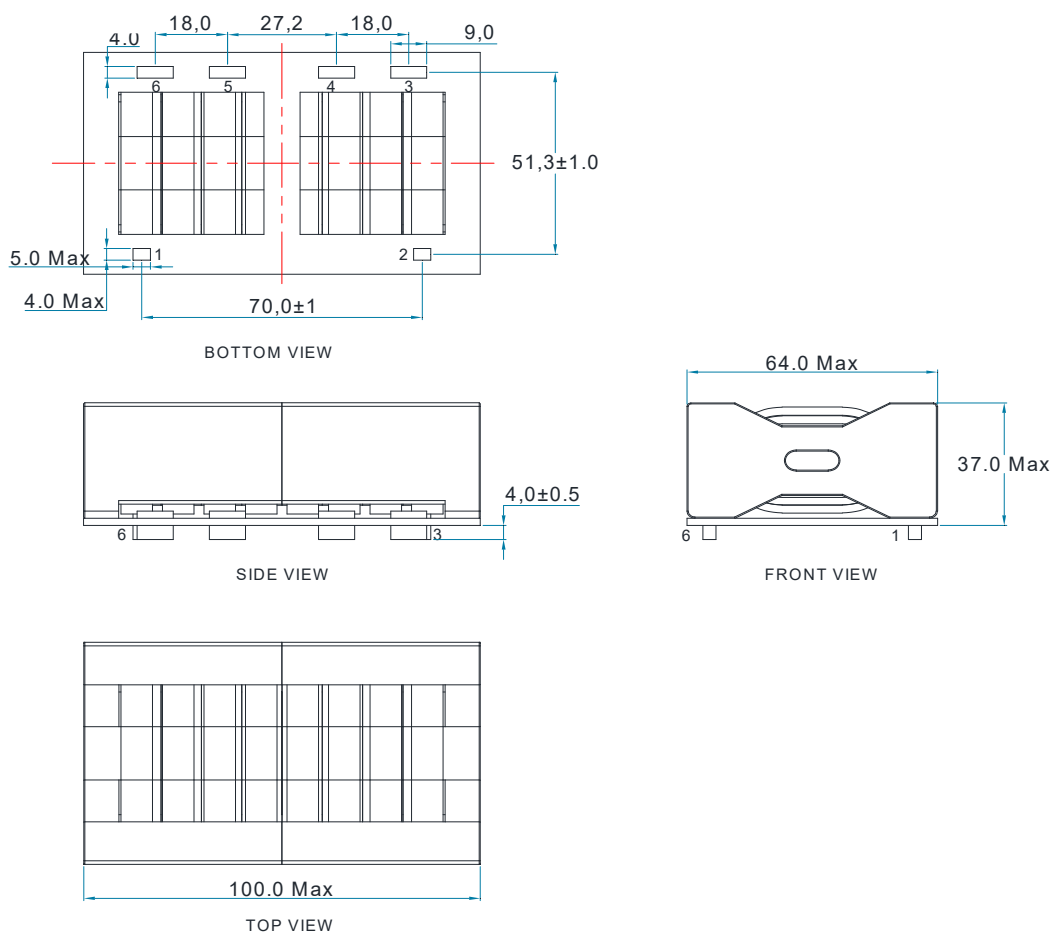

6. Electrical Characteristics 电气特性

Electrical Specifications@25℃							
Part NO.	Output power(KW)	Inductance (uH) 100KHz, 1V	Lk(uH) MAX 100KHz, 1V	Turns Ratio 20KHz, 1V	DCR (mΩ MAX)		HI-POT(VAC) 1mA/3S
2254062-1414	60	1-2	1-2	1-2:3-5/4-6	1-2	3-5/ 4-6	PIR-SEC
		77.5±5%	8.0 MAX	1:0.16:0.16	17	1.5	4.5KV