

## 1. Application 用途

- ◆ Industrial
- ◆ Automotive


## 2. Features 特性

- ◆ Hi-Pot: 4000 VAC
- ◆ Comply with IEC62368,AEC-Q200
- ◆ ≥98% Efficiency
- ◆ ROHS、Reach Compliant
- ◆ Operating Temperature Range: -40℃ to +125℃


## 3. Picture 图片



## 4. Schematic 原理图

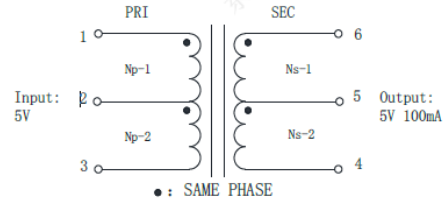

## 5. Dimension (Unit: mm) 外形尺寸

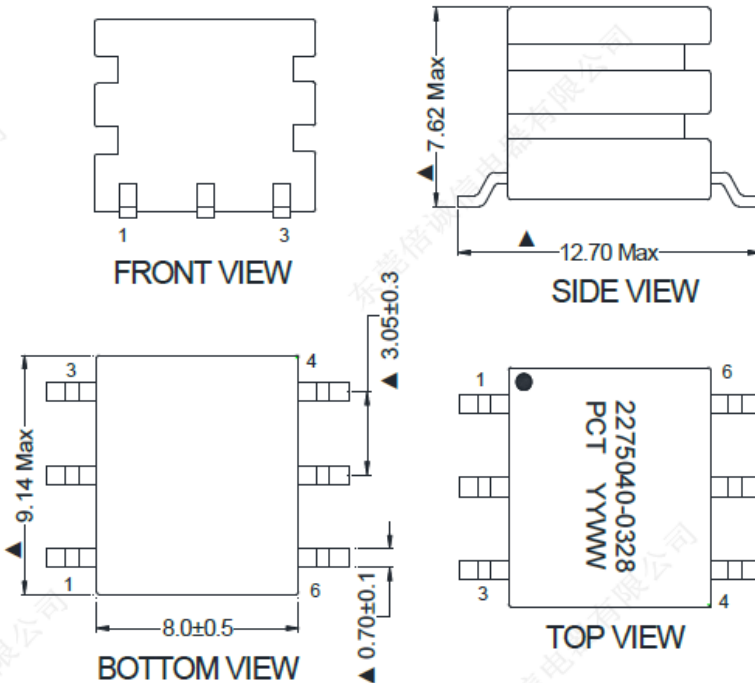

## 6. Electrical Characteristics 电气特性

Electrical Specifications@25℃

Part NO.	Output power(W)	Inductance (uH)	Lk(uH)	Turns Ratio	DCR (mΩ MAX)				HI-POT(VAC)
		100KHz,0.01V	100KHz,0.1V	20KHz,1V	6-4	1-3	/	/	5mA/60S
2275040-0328	0.5	1-2	/	NP:NS	6-4	1-3	/	/	PRI-SEC
		340.0 MIN	/	1.1 :1	335	419	/	/	4000