

1. Application 用途

- ◆ Industrial, New energy and so on


2. Features 特性

- ◆ LLC Resonant Inductor
- ◆ ROHS、Reach Compliant
- ◆ Operating Temperature Range: -40°C to +125°C





3. Picture 图片



4. Schematic 原理图



5. Dimension (Unit: mm) 外形尺寸

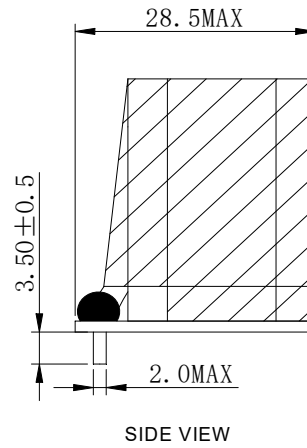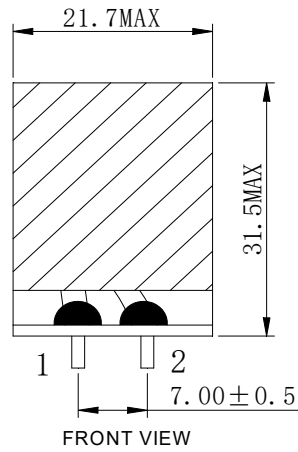

6. Electrical Characteristics 电气特性

Electrical Specifications@25°C

Part NO.	Inductance (uH) 100KHz, 1V	Turns Ratio 20KHz, 1V	DCR (mΩ MAX)	HI-POT(VAC) 1mA/60s
2454026-0874	1-2	N1	1 - 2	COIL-CORE
	22 ± 5%	/	36	500