

1. Application 用途

- ◆ Industrial, Automotive, New energy and so on


2. Features 特性

- ◆ Rated current: 40 A
- ◆ ROHS、Reach Compliant
- ◆ Operating Temperature Range: -40℃ to +125℃


3. Picture 图片



4. Schematic 原理图

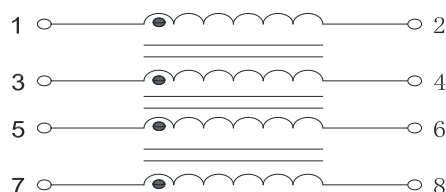

5. Dimension (Unit: mm) 外形尺寸

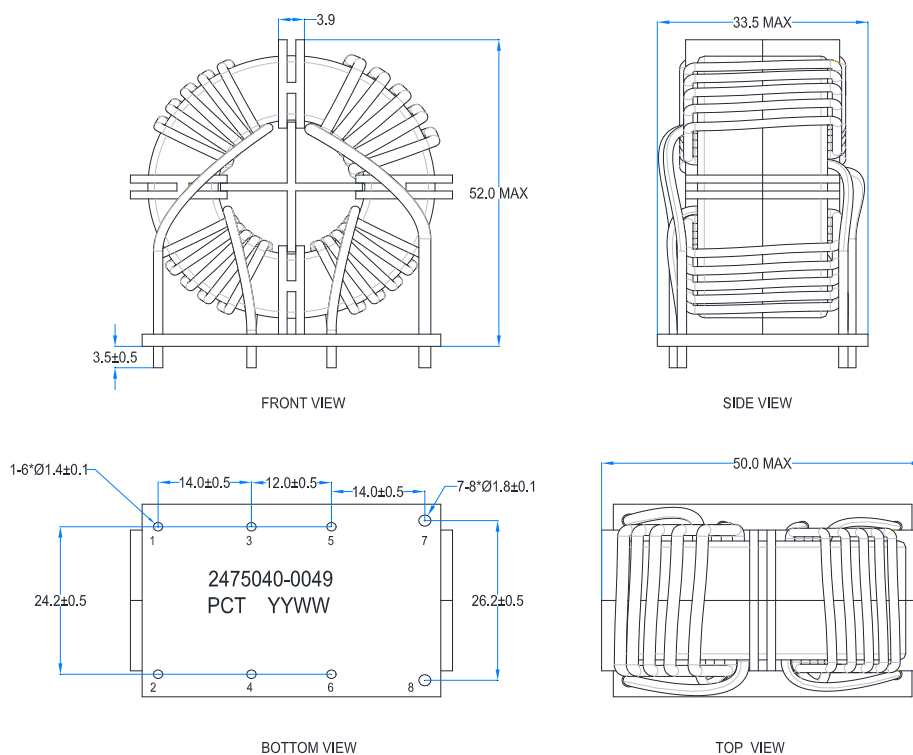

6. Electrical Characteristics 电气特性

Electrical Specifications@25℃

Part NO.	Inductance (mH) 10KHz, 1V	Turns Ratio 20KHz, 1V	DCR (mΩ MAX)		HI-POT(VAC) 1mA/3S
2475040-0049	1-2/3-4/5-6/7-8	N1:N2:N3:N4	1-2/3-4/5-6	7-8	COIL-COIL
	2.1 MIN	1:1:1:1	6.0	4.5	1500