

1. Application 用途

- ◆ Industrial , Consume and so on


2. Features 特性

- ◆ High insulation performance design
- ◆ Comply with UL,VDE, IEC60335,IEC62368
- ◆ $\geq 90\%$ Efficiency
- ◆ ROHS、Reach Compliant
- ◆ Operating Temperature Range: -40°C to $+130^{\circ}\text{C}$


3. Picture 图片



4. Schematic 原理图

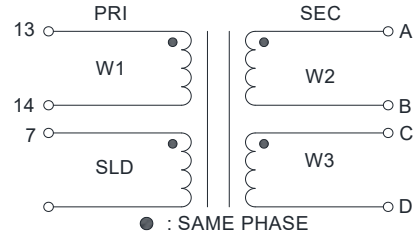

5. Dimension (Unit: mm) 外形尺寸

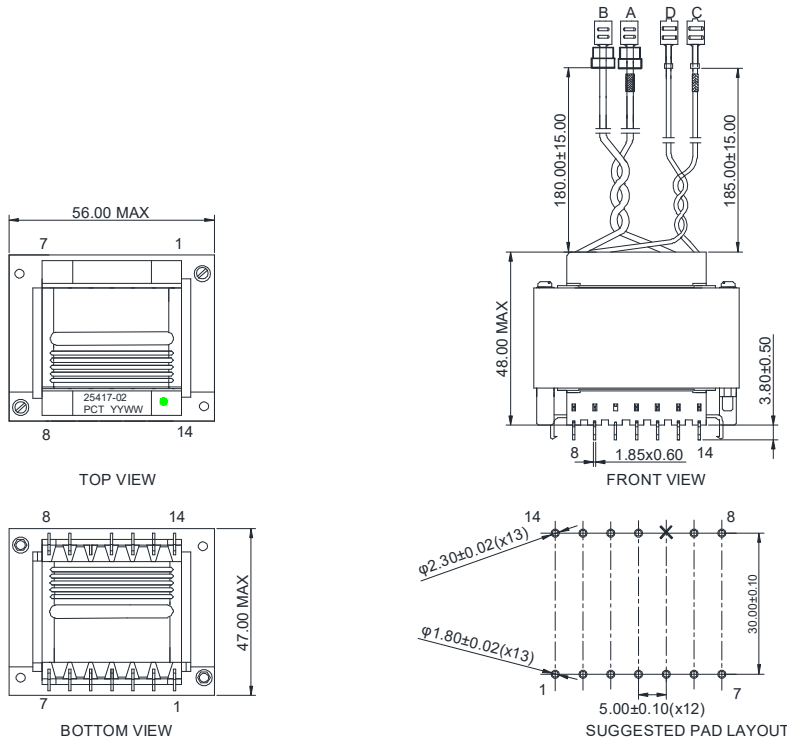

6. Electrical Characteristics 电气特性

Application						
Circuit Topology	Output power(W)	Work Frequency(Hz)	Input Voltage(V)	Output Voltage(V)	Output Current(A)	
Signal control	/	60	110AC	/	0.28	
Electrical Specifications@25°C						
Part NO.	Inductance (uH) 100KHz,1V	Lk(uH) 100KHz,1V	Turns Ratio 20KHz,1V	DCR (mΩ MAX)		HI-POT(VAC) 2.0mA/1S
25417-04	/	/	W1:W2:W3	13-14	C-D A-B /	W2,W3-SLD,Core
	/	/	4000:1:0.2	20400	39.00 5.50 /	3500