

1. Application 用途

- ◆ Consume and so on


2. Features 特性

- ◆ Through hole design
- ◆ Comply with IEC60335, IEC62368
- ◆ $\geq 95\%$ Efficiency
- ◆ ROHS、Reach Compliant
- ◆ Operating Temperature Range: -40°C to $+125^{\circ}\text{C}$


3. Picture 图片




4. Schematic 原理图

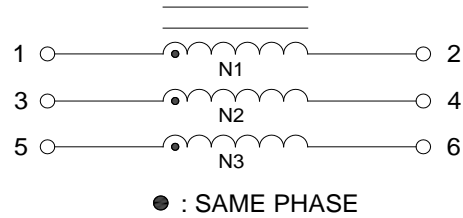


5. Dimension (Unit: mm) 外形尺寸




TOP VIEW

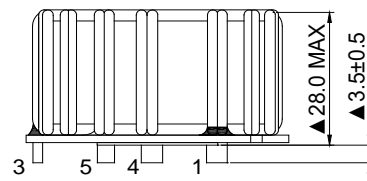

SIDE VIEW

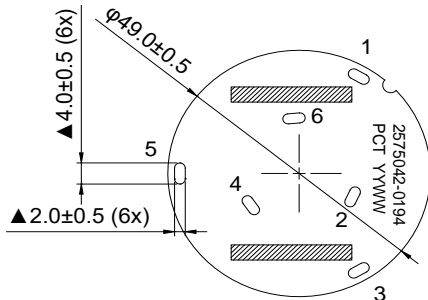

BOTTOM VIEW

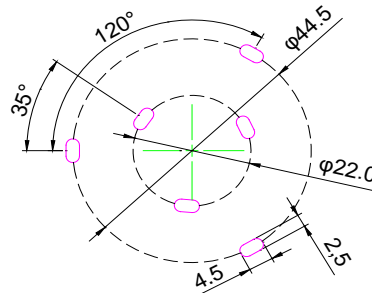

RECOMMENDED PCB LAYOUT

6. Electrical Characteristics 电气特性

Electrical Specifications @25°C

Part NO.	Output power(W)	Inductance (uH)			Lk(uH)	Turns Ratio	DCR			HI-POT(VAC)
		100KHz,1V	1KHz,1V	20KHz,1V			(mΩ MAX)			
2575042-0194	/	1-2	3-4	5-6	/	1-2:3-4:5-6	1-2	3-4	5-6	N1- N2-N3
		470	470	470	/	1:1:1	1.8	1.8	1.8	1500