

1. Application 用途

- ◆ New energy, Industrial and so on


2. Features 特性

- ◆ Comply with IEC60335, IEC62368
- ◆ $\geq 95\%$ Efficiency
- ◆ ROHS、Reach Compliant
- ◆ Operating Temperature Range: -40°C to $+155^{\circ}\text{C}$


3. Picture 图片



4. Schematic 原理图




5. Dimension (Unit: mm) 外形尺寸

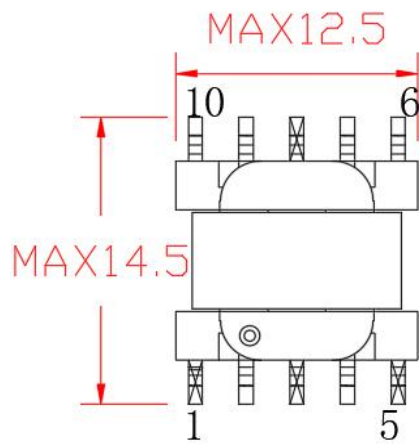

顶视图



侧视图

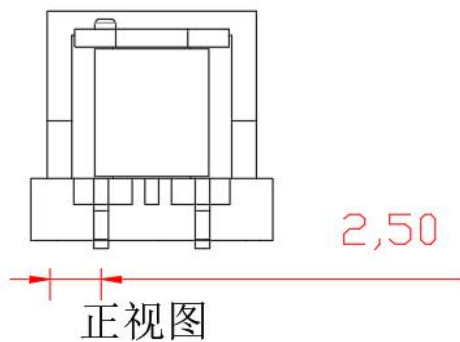

正视图

6. Electrical Characteristics 电气特性

Electrical Specifications@25℃									
Part NO.	Output power(W)	Inductance(uH)) 100KHz,1V	Lk(uH)MAX 100KHz,1V	Turns Ratio 100KHz,1V	DCR (mΩ MAX)				HI-POT(VAC) 2mA/60S
3211010-1159	9.4	2-4	2-4	N1: N2: N3	/	/	/	/	N1 - N2/N3
		TBD	≤2uH	1: 0.92: 0.92	/	/	/	/	3000