

1. Application 用途

- ◆New energy and so on


2. Features 特性

- ◆ Through hole design
- ◆ Comply with IEC60335,IEC62368
- ◆ ≥95% Efficiency
- ◆ ROHS、Reach Compliant
- ◆ Operating Temperature Range: -40℃ to +130℃


3. Picture 图片



4. Schematic 原理图



5. Dimension (Unit: mm) 外形尺寸

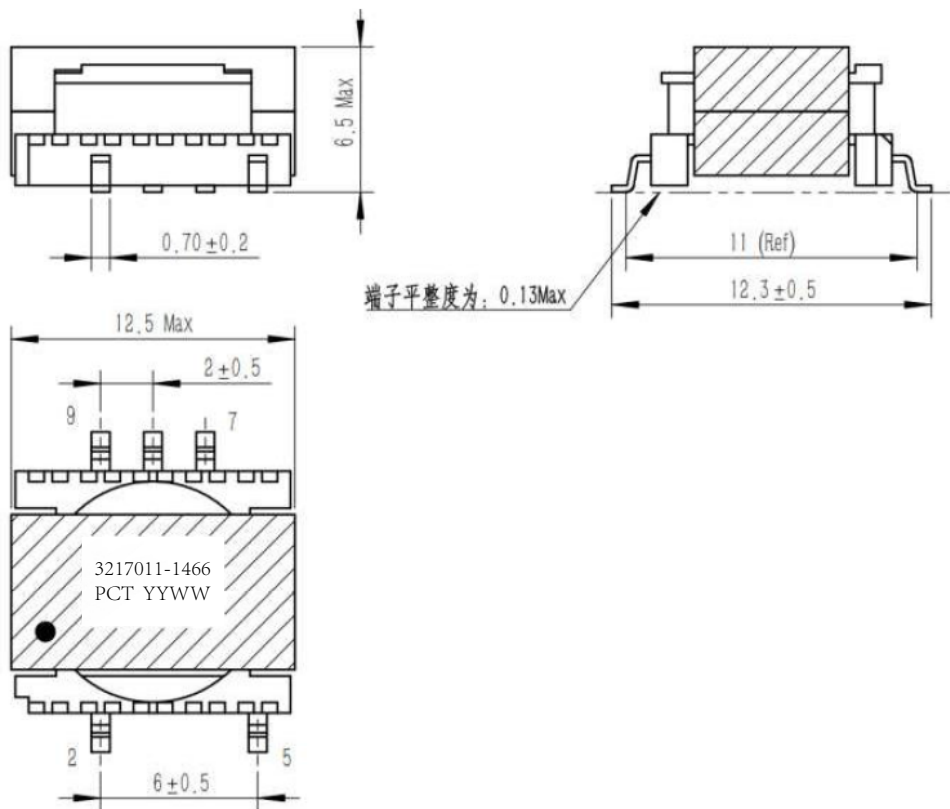

6. Electrical Characteristics 电气特性

Electrical Specifications@25℃									
Part NO.	Output power(W)	Inductance(uH) 20KHz,0.1V	Lk(uH)MAX 20KHz,0.1V	Turns Ratio 20KHz,1V	DCR (mΩ MAX)				HI-POT(VAC) 5mA/3S
3217011-1466	/	2-5	/	2-5:7-8:8-9	2-5	7-9	/	/	PRI-SEC
		120±35%	/	1 : 2.3 : 2.3	150	1200	/	/	1000