

1. Application 用途

- ◆ New energy, Industrial and so on


2. Features 特性

- ◆ Comply with IEC60335, IEC62368
- ◆ $\geq 95\%$ Efficiency
- ◆ ROHS、Reach Compliant
- ◆ Operating Temperature Range: -40°C to $+155^{\circ}\text{C}$


3. Picture 图片



4. Schematic 原理图



5. Dimension (Unit: mm) 外形尺寸

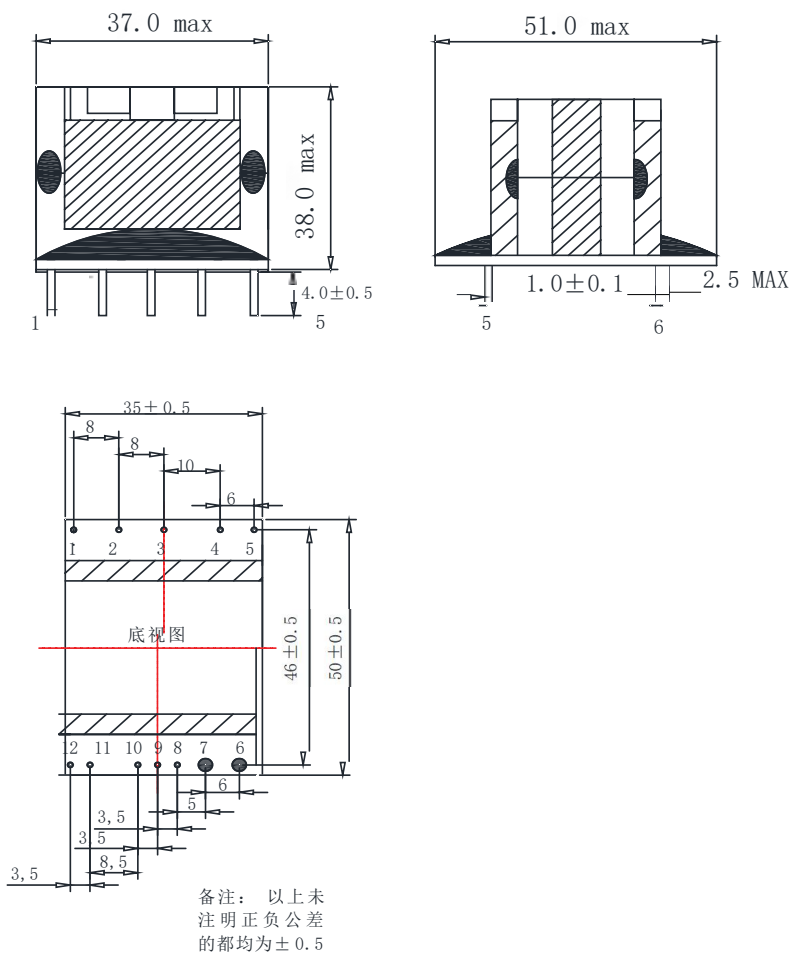

6. Electrical Characteristics 电气特性

Electrical Specifications@25 $^{\circ}\text{C}$									
Part NO.	Output power(W)	Inductance(uH)) 100KHz,1V	Lk(uH)MAX 100KHz,1V	Turns Ratio 100KHz,1V	DCR (m Ω MAX)				HI-POT(VAC) 5mA/60S
3254035-1158	452	1-2	1-2	/	/	/	/	/	PRI-SEC
		270 $\pm$ 5%	14	/	/	/	/	/	3000