

1. Application 用途

- ◆ New energy, Industrial and so on


2. Features 特性

- ◆ Comply with IEC60335, IEC62368
- ◆ $\geq 95\%$ Efficiency
- ◆ ROHS、Reach Compliant
- ◆ Operating Temperature Range: -40°C to $+155^{\circ}\text{C}$


3. Picture 图片




4. Schematic 原理图




5. Dimension (Unit: mm) 外形尺寸

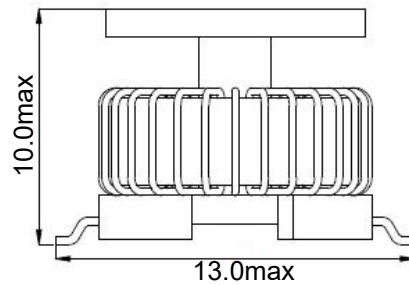

主视图

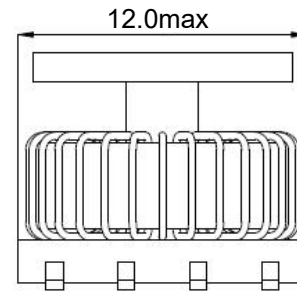

侧视图

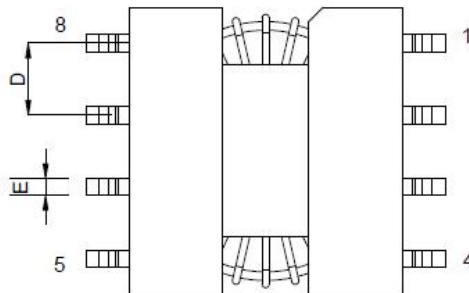

底视图

6. Electrical Characteristics 电气特性

Electrical Specifications@25℃									
Part NO.	Output power(W)	Inductance(uH)) 10KHz,0.3V	Lk(uH)MAX 10KHz,0.3V	Turns Ratio 100KHz,1V	DCR (mΩ MAX)				HI-POT(VAC) 3mA/3S ARC7
3275009-1317	5	3-2	/	N1: N2: N3	3-2	/	/	/	N1-N2/N3
		65 Min	/	1: 2.25: 2.25	TBD	/	/	/	3600