


1. Application 用途

- ◆ New energy and so on


2. Features 特性

- ◆ Comply with AEC-Q200, IEC62368
- ◆ ROHS、Reach Compliant
- ◆ Operating Temperature Range: -40℃ to +155℃


3. Picture 图片



4. Schematic 原理图



5. Dimension (Unit: mm) 外形尺寸

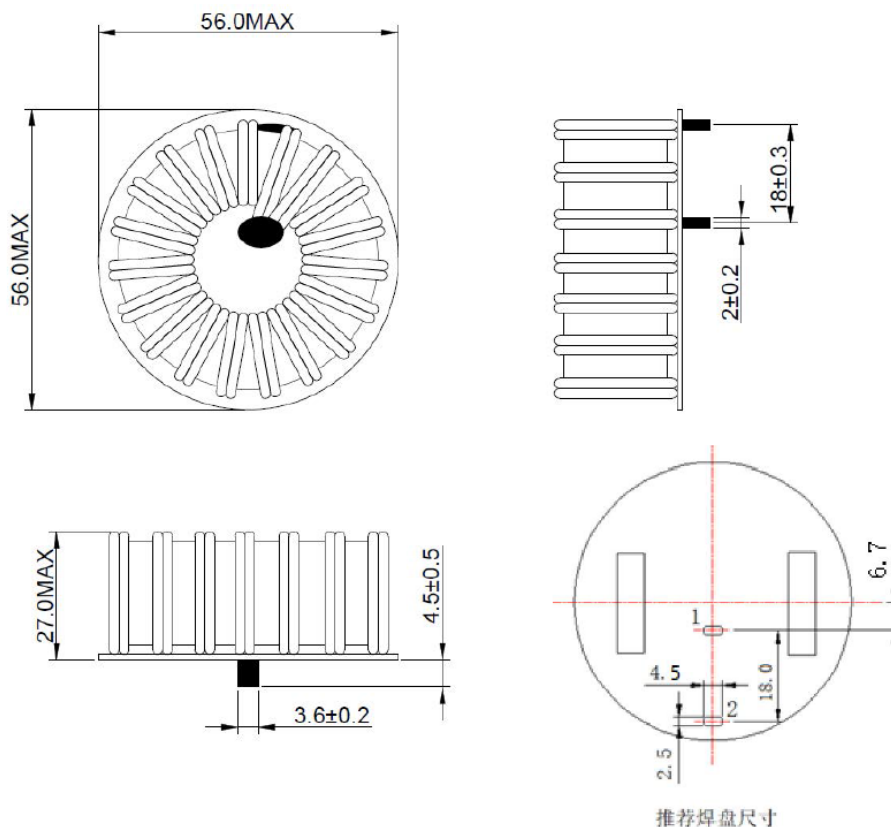

6. Electrical Characteristics 电气特性

Electrical Specifications@25℃

Part NO.	Inductance (uH)		Lk(uH)	Turns Ratio	DCR				HI-POT(VAC)
	20KHz, 1V		20KHz, 1V	20KHz, 1V	(mΩ ±20%)				5mA/3S
3475046-1321	1-2	/	/	/	1-2	/	/	/	1-2
	50.0±12%	/	/	/	4.2	/	/	/	1500