


1. Application 用途

- ◆ New energy and so on


2. Features 特性

- ◆ Comply with AEC-Q200, IEC62368
- ◆ ROHS、Reach Compliant
- ◆ Operating Temperature Range: -40℃ to +155℃


3. Picture 图片



4. Schematic 原理图



5. Dimension (Unit: mm) 外形尺寸

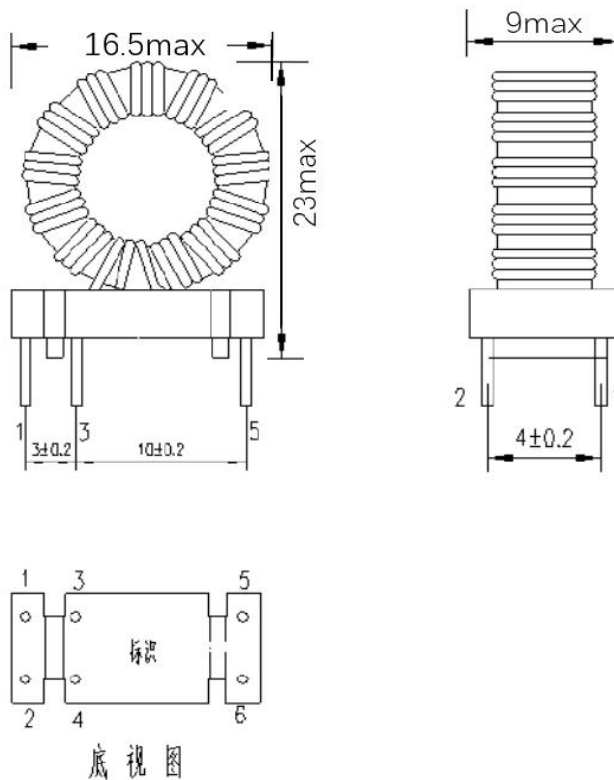

6. Electrical Characteristics 电气特性

Electrical Specifications@25℃									
Part NO.	Inductance (uH) 10KHz, 1V		Lk(uH) 10KHz, 1V	Turns Ratio 10KHz, 1V	DCR (mΩ MAX)				HI-POT(VAC) 2mA/60S
3575014-1157	1-2	3-4	/	N1:N2:N3	1-2	3-4	5-6	/	N1 N2-N3
	820μH±25%	820μH±25%	/	1:1:1	335	335	335	/	2500