


1. Application 用途

- ◆ New energy, Automotive and so on


2. Features 特性

- ◆ Comply with AEC-Q200, IEC62368
- ◆ ROHS、Reach Compliant
- ◆ Operating Temperature Range: -40℃ to +155℃


3. Picture 图片



4. Schematic 原理图



5. Dimension (Unit: mm) 外形尺寸

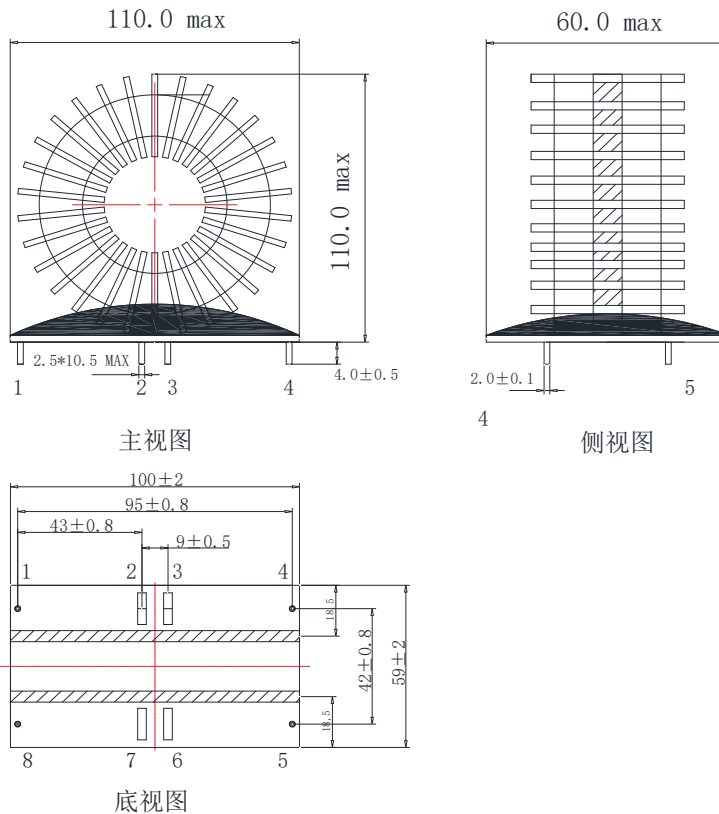

6. Electrical Characteristics 电气特性

Electrical Specifications@25℃									
Part NO.	Inductance (mH) 10KHz, 1V		Lk(uH) 10KHz, 1V	Turns Ratio 1KHz, 1V	DCR (mΩ MAX)				HI-POT(VAC) 5mA/3S
3575077-1156	2-7	3-6	/	N1:N2	2-7	3-6	/	/	N1-N2
	36uH+10%-15%	36uH+10%-15%	/	1:1	3	3	/	/	500