


1. Application 用途

- ◆ Automotive DC-DC


2. Features 特性

- ◆ Hi-Pot: 4000 DC
- ◆ Basic insulation comply with IEC 60664, IEC62368, AEC-Q200
- ◆ ROHS、Reach Compliant
- ◆ Operating Temperature Range: -40°C to +130°C


3. Picture 图片



4. Schematic 原理图

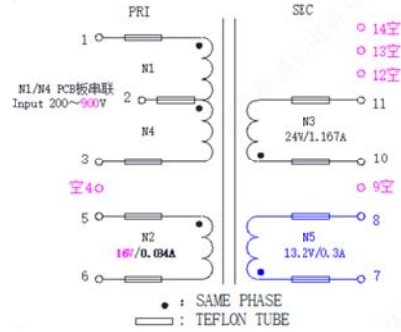

5. Dimension (Unit: mm) 外形尺寸

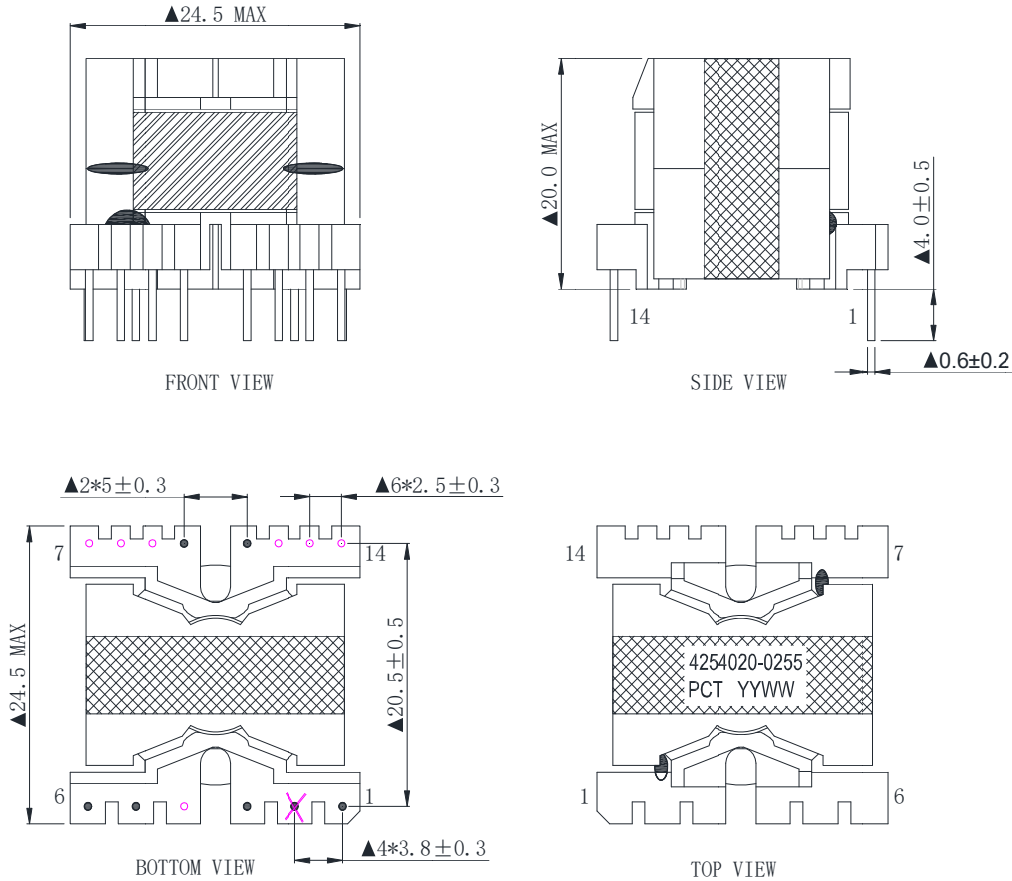

6. Electrical Characteristics 电气特性

Electrical Specifications@25°C								
Part NO.	Output power(W)	Inductance(uH) 100KHz,1V	Lk(uH)MAX 100KHz,1V	Turns Ratio 20KHz,1V	DCR (mΩ MAX)			HI-POT 1mA/3S
T26033A-0	30	1~3	1~3	1-3-5-6:7-8-10-11	1~3	5~6	7-8	PRI-SEC
		1200	18	70:6:5:9	1200	110	78	4000 VDC