


1. Application 用途

- ◆ Industrial, New energy and so on


2. Features 特性

- ◆ Comply with IEC62368-1
- ◆ ≥85% Efficiency
- ◆ ROHS、Reach Compliant
- ◆ Operating Temperature Range: -40℃ to +125℃


3. Picture 图片




4. Schematic 原理图




5. Dimension (Unit: mm) 外形尺寸

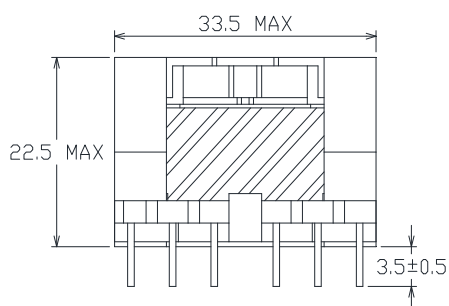


FRONT VIEW



SIDE VIEW

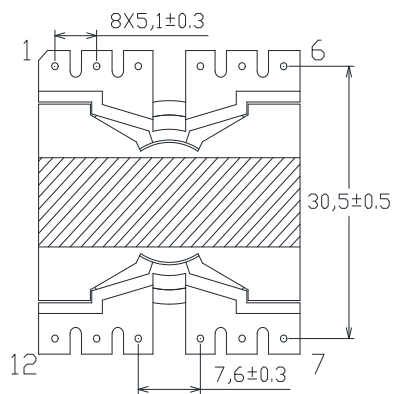

BOTTOM VIEW



TOP VIEW

6. Electrical Characteristics 电气特性

Part NO.	Inductance (uH) 100KHz, 1V	Turns Ratio 20KHz, 1V	DCR (mΩ MAX)	HI-POT(VAC) 1mA/3S
43217-05	9-10	N1	1-2	COIL-CORE
	56±10%	/	30	1.0.0KV