


1. Application 用途

- ◆ Automotive DC-DC


2. Features 特性

- ◆ Hi-Pot:3000VDC
- ◆ Basic insulation comply with IEC 60664, IEC62368, AEC-Q200
- ◆ ROHS、Reach Compliant
- ◆ Operating Temperature Range: -40℃ to +125℃





3. Picture 图片



4. Schematic 原理图

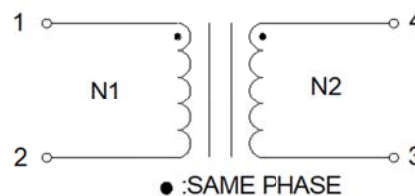

5. Dimension (Unit: mm) 外形尺寸

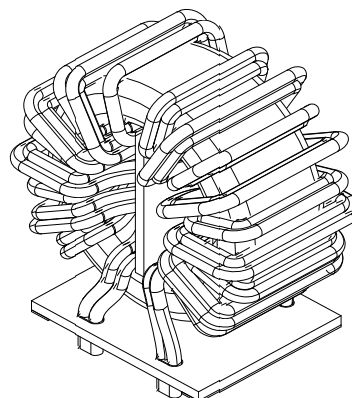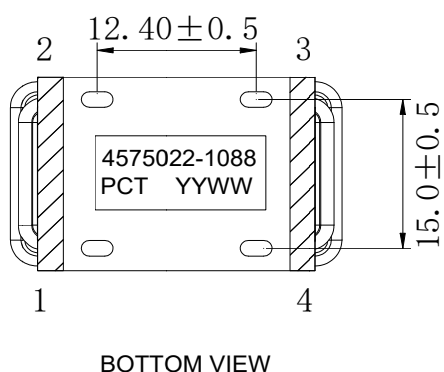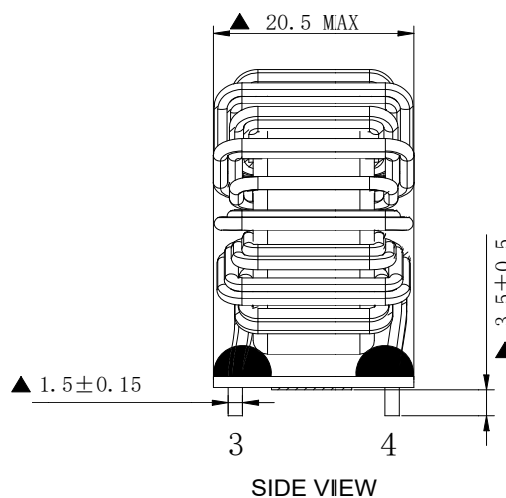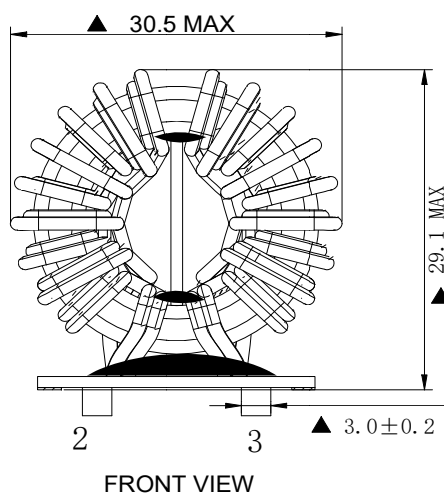

6. Electrical Characteristics 电气特性

Electrical Specifications@25℃								
Part NO.	Output power(W)	Inductance(uH) 10KHz,1V	Inductance(uH) 10KHz,1V	Turns Ratio 20KHz,1V	DCR (mΩ MAX)			HI-POT 1mA/3S
4575022-1088	3300	1~2	4~3	1~2:4~3	1~2	4~3	/	COIL-COIL
		2000	2000	1:1	1.8	1.8	/	2400 VAC