

## 1. Application 用途

- ◆ Automotive Busbar Inductor

## 2. Features 特性

- ◆ High current and flattened design
- ◆ Comply with AEC-Q200
- ◆ ROHS、Reach Compliant
- ◆ Operating Temperature Range: -40°C to +155°C





## 3. Picture 图片



## 4. Schematic 原理图



## 5. Dimension (Unit: mm) 外形尺寸

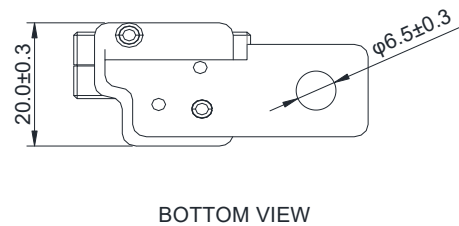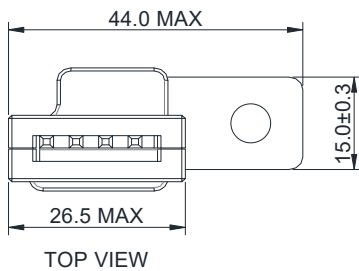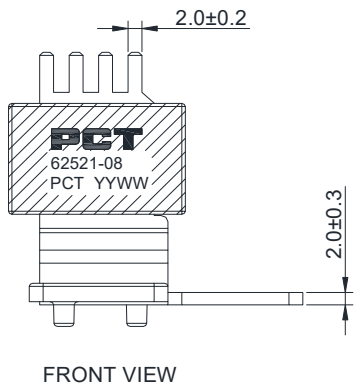

## 6. Electrical Characteristics 电气特性

Electrical Specifications@25°C

Part NO.	Inductance (uH)	Inductance (uH)	Turns Ratio	DCR				HI-POT(VAC)
	100KHz,0.1V	100KHz,0.1V 230A		(Ω MAX)				
62521-08	S-F	S-F	N1	/	/	/	/	/
	0.255~0.345	0.15 MIN	/	/	/	/	/	/