

1. Application 用途

- ◆ Automotive CMC and DMC Inductor

2. Features 特性

- ◆ Matched copper busbar design
- ◆ Comply with AEC-Q200
- ◆ ≥98% Efficiency
- ◆ ROHS、Reach Compliant
- ◆ Operating Temperature Range: -40°C to +155°C


3. Picture 图片



4. Schematic 原理图

None

5. Dimension (Unit: mm) 外形尺寸

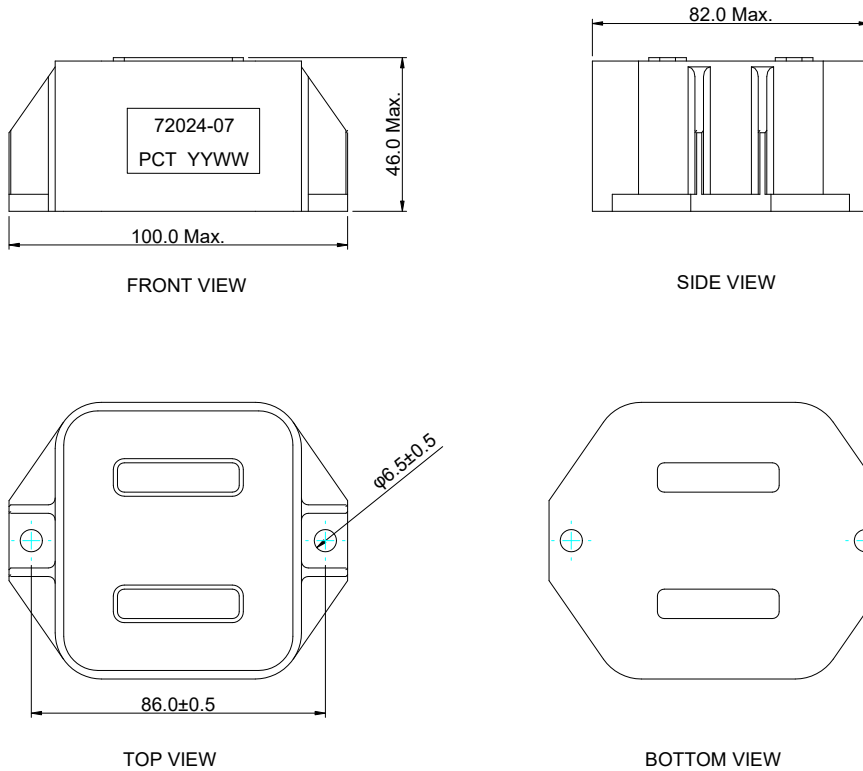

6. Electrical Characteristics 电气特性

Electrical Specifications@25°C

Part NO.	Inductance (uH) 10KHz, 1V		Lk(uH)	Turns Ratio 20KHz, 1V	DCR (mΩ MAX)				HI-POT(VDC) /
	Left / Right	Left + Right			/	/	/	/	
72024-07	36.0 Min	1.1±25%	/	/	/	/	/	/	/
			/	/	/	/	/	/	/